# Fidelity from every angle

We've crafted three new speakers: a surround-sound powerhouse, a standalone masterpiece and a stirring stereo experience. The twist? They're all the same speaker.

Beolab 8 is the embodiment of versatility. Hear it shine on its own, sing in any set up and perform wherever you place it.




# Why you'll love it

- Groundbreaking, room-shaking sound.
- High-resolution wireless streaming built in.
- Maps your room for peak playback.
- Plays anywhere. Table, floor, wall, it's your call.
- Future-ready: swappable covers and upgradeable parts.




## Measurements


TABLE STAND









FLOOR STAND

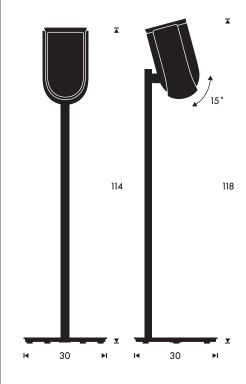

WALL BRACKET











CEILING BRACKET









Basic

PRODUCT DIMENSIONS

On a table or shelf: 16.5 W x 29 H x 17.2 D cm

On the floor:

 $30.0 \text{ W} \times 114.0 \text{ H} \times 30 \text{ D} \text{ cm}$ 

Wall mounted:

 $16.5\,\mathrm{W}\,\mathrm{x}\,27.9\,\mathrm{H}\,\mathrm{x}\,21.5\,\mathrm{D}\,\mathrm{cm}$ 

On ceiling:

 $17~W\ x\ 36~H\ x\ 23.1~D~cm$ 

WEIGHT

Speaker only: 4.1 kg

RECOMMENDED ROOM SIZE

10 - 50 m<sup>2</sup>

MATERIALS

Aluminium Fabric / Wood

Polymer

**PLACEMENT** 

Table Shelf

Floor

Wall mounted Ceiling

OPERATING CONDITIONS

Temperature: 0-40° C Humidity: 30-70% RH

**Technical** 

POWER AMPLIFIERS

1 x 50 watt, class D for tweeter 1 x 50 watt, class D for mid-range 1 x 200 watt, class D for woofer

SPEAKER DRIVERS

1 x 0.6" tweeter 1 x 3.0" mid-range 1 x 5.25" woofer

MAXIMUM SOUND

PRESSURE LEVEL @1M 101 dB SPL (single speaker)

104 dB SPL (pair)

BASS CAPABILITY @1M

84 dB SPL (single speaker)

90 dB SPL (pair)

FREQUENCY RANGE

28 - 23.000 Hz

**POWER SUPPLY** 

Power cable included

ADVANCED SOUND FEATURES

Active Room Compensation Beam Width Control Thermal Protection

Adaptive Bass Linearization

VOICE ASSISTANT

Νo



### Connectivity

#### **WIRELESS CONNECTIONS**

Dual band WLAN 2.4 & 5 GHz IEEE 802.11 b/g/a/n/ac/ax Bluetooth 5.3

#### STEREO PAIRING

Bang & Olufsen Stereo Pairing<sup>1</sup>

#### CONNECTIONS

2 x Ethernet 10/100 Mbit (for Internet and Digital Power Link) 1 x USB-C

1 x Powerlink (RJ45) 2 channels

#### **WIRELESS CONNECTIONS**

Wireless Power Link (24 bit / 48 kHz) Digital Power Link (24 bit / 48 kHz)

#### STREAMING SERVICES

Google Cast TM 2
Apple AirPlay
Bluetooth audio streaming
Spotify Connect
TIDAL Connect
Deezer Connect
HomeMedia

#### INTEGRATED MUSIC SERVICES

Bang & Olufsen Radio TIDAL Deezer

#### **BEOLINK SURROUND**

Wirelessly connect your speakers to a Beosound soundbar or Beovision to enjoy a true surround sound experience.<sup>3</sup>

#### MULTIROOM

Apple AirPlay, Google Cast and Beolink Multiroom® technologies are integrated and ready for you to create a wireless Multiroom setup with Beolab 8.

#### SUPPORTED AUDIO FORMATS

MP3, WMA, AAC, ALAC, FLAC, WAV, AIFF, OGG, HLS Standard sample rates up to 192 kHz, stereo and up to 24 bit Note: WMA lossless is not supported

#### **REMOTE CONTROL**

Beoremote One BT Beoremote Halo Bang & Olufsen App

<sup>1</sup>Bang & Olufsen Stereo Pairing is factory default encoded using LC3plus high resolution Codec. LC3plus is licensed by Fraunhofer IIS: www.iis.fraunhofer.dk/audio

 $^2$ Google and Google Cast are trademarks of Google LLC. Google Assistant is not available in certain languages and countries.

<sup>3</sup>Beosound / Beovision Theatre only

#### Other information

#### DESIGNER

Noto Design GmbH

#### IN THE BOX

Beolab 8
Power cable
Quick start guide
Speaker bracket (part that connect the speaker to the stands)
Back covers (Left and Right)

#### BASE

Natural aluminium



#### FRONT COVER

Grey Melange fabric or oak



Black Anthracite aluminium



FRONT COVER

Dark oak



Gold Tone aluminium



FRONT COVER

Light oak





# Available for customisation

With the B&O AR Experience app, you can preview the customisation options and view the speakers in different rooms.

Ask in store or visit www.bang-olufsen.com for more information.





# **Key Selling Points**

# GROUNDBREAKING, ROOMSHAKING SOUND.

Enjoy all the power and pedigree of a Beolab speaker, anywhere in your home. A three-driver set up delivers detail and depth. The bass hits you with an intensity you wouldn't expect from a speaker the size of a sheet of paper. And it doesn't just have surprising brawn. It's got the brains to match.

# LET THE MOMENT CLICK

With our Mozart platform at its heart, Beolab 8 can connect easily through WiFi 6 and Bluetooth 5.3. And it can stream just about anything. The platforms you love now. And the ones you'll love in the future. It has the power to process and play them all.

#### DECADES OF DESIGN. DISTILLED.

Beolab 8 is an all-out effort in effortless design. On top, an intuitive glass interface reacts to your fingertips. At the base, it nestles into a single piece of flowing aluminium – shaped in our fabled Factory 5.

Each of the three stand options is a piece of art in itself. Slender. Sculptural. Made to amplify Beolab 8's elegance. And that elegance? Yours to personalise. With richly textured fabric. Bands of solid oak. Whatever your aesthetic, Beolab 8 will optimise its sound to make the most of your chosen materials. The final touch? A laser-cut Bang & Olufsen marque that shines with light.